

Triton Grounding Jumper Solutions



UL-certified off-the-shelf Triton Grounding Jumpers enable the safe management of high-power applications, and customized versions offer variable lengths and terminations

Features and Advantages

UL certification


Ensures quality, safety and reliability

Fused termination available

Provides:
~ 93% solid termination throughout compression
Increased cross-sectional contact area
Increased pull-out strength
Custom terminals

Custom lengths and termination

Offers design flexibility

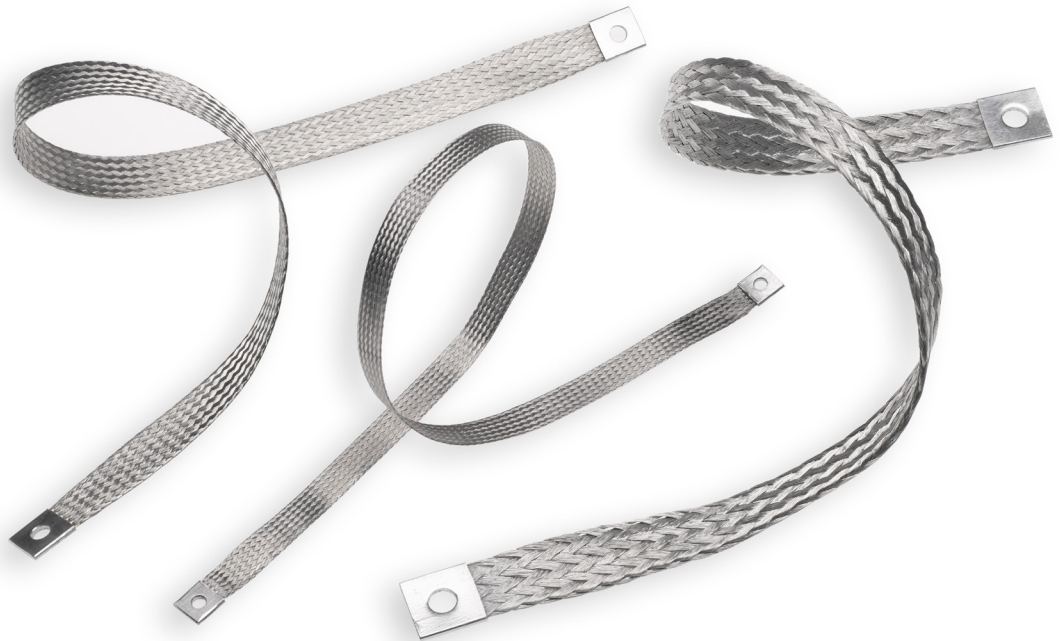

Applications

Data Centers

- Servers
- High-End Computers

Industrial


- Mining
- HVAC
- Electrical Enclosures
- Electrical Panel Doors
- Security Fences Around
- Substations and Utilities
- Fence and Gate Jumpers
- Generators and Transformers
- Power and Utility Boards
- Oil, Gas and Flammable
- Liquid Tanks
- Other Equipment Used in
- Static Grounding
- Factory Automation

Commercial Vehicles

- Agriculture
- Rail
- Truck
- Construction
- Marine



Factory Automation

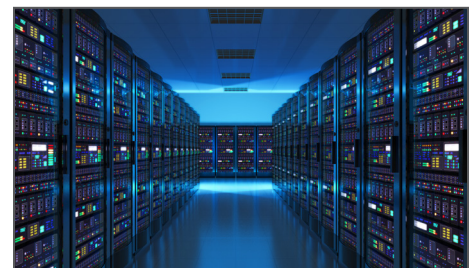

Data Centers

Specifications

REFERENCE INFORMATION

UL File No.: E198234, Vol. 2
Designed In: Inches

ELECTRICAL

Current (max.): 53.0, 105.0, 150.0A

PHYSICAL

Ferrules: Compressed Seamless Copper Tube Braid
Plating: Electro-Plated Tin Copper

Note: Molex reserves the right to delay or cancel production of the depicted product without additional notice. Please contact your Molex customer service representative for product availability.

www.triton-mfg.com

Molex is a registered trademark of Molex, LLC in the United States of America and may be registered in other countries; all other trademarks listed herein belong to their respective owners.